

TECHNICAL SPECIFICATIONS

CODE: APH100		Linak Control System	
Mattress Platform Width	1200mm	Thigh Section Angle	0-30°
Mattress Platform Length	2150mm	Calf Section angle	13-17°
Total Bed Width	1360mm	Caster Diameter	120mm
Total Bed Length	2290mm	Trendelenburg / reverse Trendelenburg angle	0-10°
Mattress base length	2020mm	Lockable Handset	Yes
Minimum mattress platform height from the floor	330mm	Warranty on metal work	5 years
Maximum mattress platform height from the floor	730mm	Warranty on electrical parts	5 years
Maximum User Weight (MUW)	350kg / 55 Stone	Mattress retainers	Yes
Safe Working Load (SWL)	385kg / 60 Stone	Auto-regression	Yes
Backrest Angle	0-73°	Detachable Aluminium side rails (meet clause 201.9.8.3.3.3 of IEC 60601-2-52)	



Due to ongoing research and development, Apollo Healthcare Technologies Ltd, reserve the right to change specifications without prior notice. This will not affect the efficacy of the system. Always consult the user manual for instructions for use.

If you require more information, please call our sales team on Tel: +44 (0) 1924 614567




Apollo Healthcare Technologies Limited
Holme Street, Liversedge, West Yorkshire WF15 6JF
Tel: +44 (0) 1924 614567 Fax: +44 (0) 1924 607480
Email: sales@apollo-ht.co.uk www.apollo-ht.co.uk



**60 Seconds
One Person
Installation**

Apollo Olympus Bariatric Folding Bed

The Olympus Bariatric Electric Folding Bed is a stylish robust easy to use community/care home full electric profiling bed incorporating easy 60 seconds installation and no manual handling

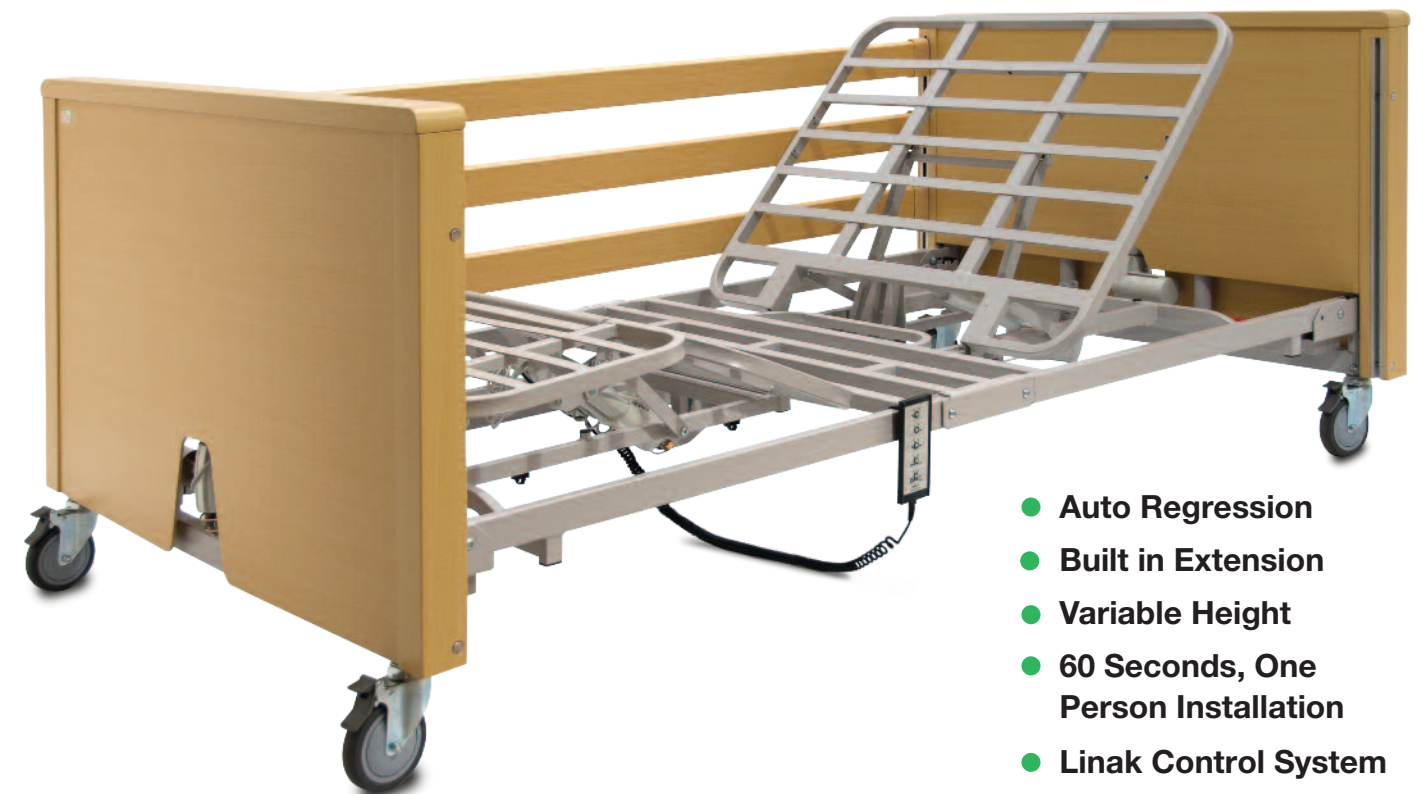

- Auto Regression
- Built in Extension
- Variable Height
- 60 Seconds, One Person Installation
- Linak Control System



www.apollo-ht.co.uk

Apollo Olympus Bariatric Folding Bed

The Olympus Bariatric Electric Folding Bed which combines ease of handling and functionality with an attractive design to ensure that it is ideal for community and care home use.

The key feature of this bed is that it folds electrically, meaning it can be delivered and installed by one person. This will save a considerable amount of time and reduce the likelihood / risk of back injury during process of installation.

- Featuring auto-regression to increase comfort when activating the backrest whilst reducing shear/friction forces.
- Easy to use handset control optimise patient comfort and well-being.
- Complimented by 3 bar, full length safety side rails.

**60 Seconds
One Person
Installation**




● Transport Mode / Folded



● Low Setting 330mm



● Individual Lockable Castors

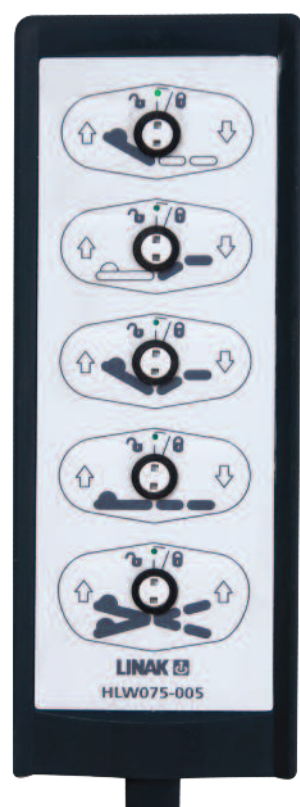


● Linak Multi-functional Lockable Handset



● Single Button Control To Install



● Single Button Control To Foldaway After Use

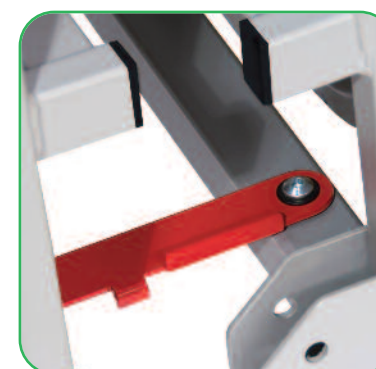

● Transport Locking Bracket

